

## One Meter Works for Both Energy Saving and Power Quality Surveillance



**High accuracy:  
0.2 %\***

**Harmonic  
measurement\***

**Simple demand  
management\***


**Unbalanced  
measurement\***

\*Advanced type

# 0.2 % accuracy, Advanced type debuted!

Multi-function power meter featuring a simple demand management and power quality surveillance function in addition to the energy saving

## KW9M series

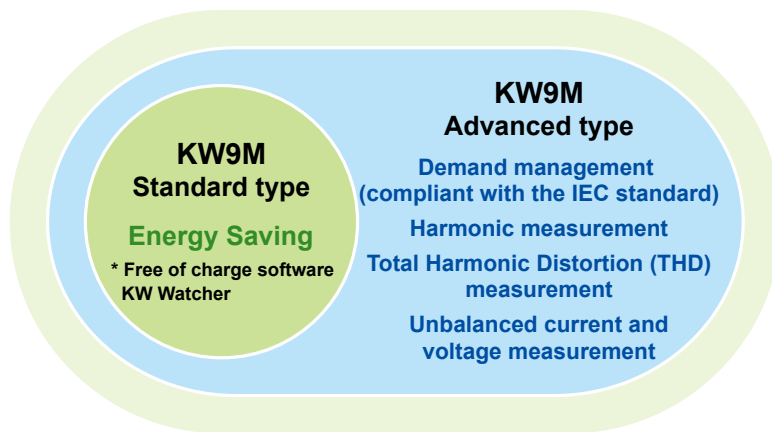

\* Current and voltage measurement accuracy of the advanced type.  
Active power: Class 0.5S (IEC62053-22)



### Energy Saving (Standard type)



#### Fields

- Factory
- Store
- Office
- Infrastructure (Freeway, railway station · facility, etc)
- Theme park

#### Applications

- Visualizing power consumption by department or equipment
- Monitoring for any waste of standby power
- Improving the unit consumption
- ...

### Demand Management and Power Quality Surveillance (Advanced type)



#### Fields

- Factory
- Store
- Office
- Power station
- Infrastructure (Freeway, railway station · facility, etc)
- Public facilities

#### Applications

- Energy-saving through demand management (compliant with the IEC standard)
- Surveillance and improving power quality
- Preventive maintenance of power equipment
- ...


## Function 1

### Demand measuring function compliant with IEC61557-12 effective for energy saving

\* 30-min demand method is also selectable for use in Japan.


#### IEC demand (Sliding block interval and Fixed block interval)

Users set the time span for demand calculation to an arbitrary value between 1 to 60 minutes (in increments of one minute). The average power demand within the set span is calculated at the end of the span. [The demand values of active, reactive, apparent, active (export), and reactive (export) power are calculated.]

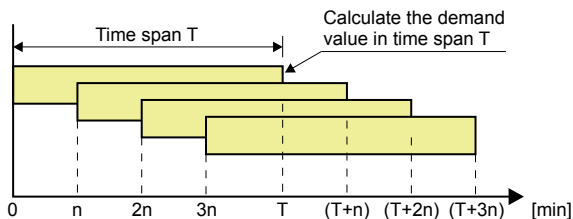

#### • Sliding block interval method


The next time span starts "n" minutes later. (Value "n" is arbitrarily set by users.)

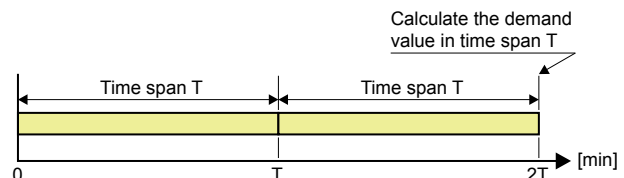

#### • Fixed block interval method

The next time span starts after completion of the current span.

### System configuration

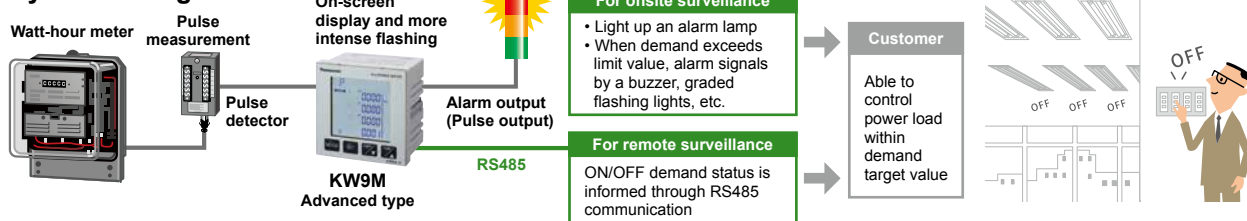


\* Also ready for CT inputs (electric power measurement)

## Function 2

### Harmonic measurement (Advanced type)


Inverter equipment and fluorescent lighting fixtures are harmonic sources and can have adverse effects on precision equipment, thereby causing it to malfunction.

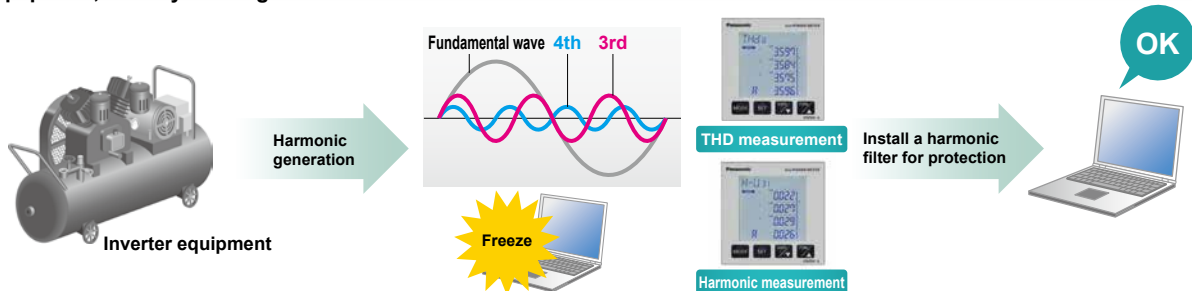

## Function 3

### Improvement of between phases unbalance (Advanced type)

If there is an unbalanced load due to a V-connected transformer or a heater, a voltage imbalance occurs between phases, and the motor torque becomes insufficient, causing a rise in heat or reduction in product life.

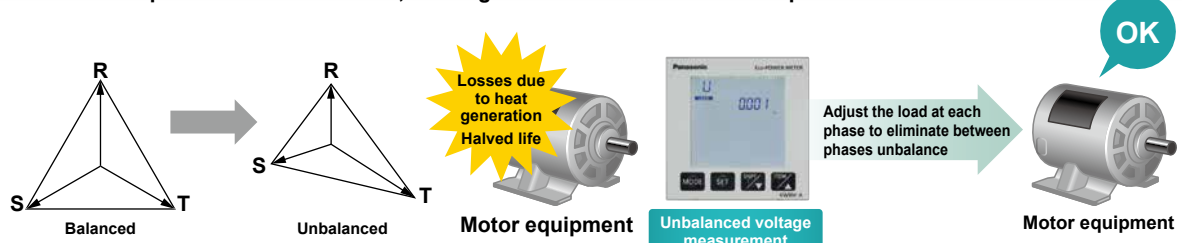


# Features

## Multi-Function Power Meter Eco-POWER METER® KW9M SERIES

Eco-POWER METER® is a registered trademark of Panasonic Corporation. (Registered Trademark No. 5501901)

### Feature 1

Large-screen LCD with backlight clearly displays the electric power of each phases and their total on one screen.

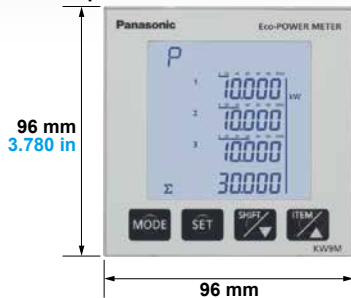

Large key switches for easy operations

### Feature 2

Capable of displaying small currents of 1 mA or above. This allows for the monitoring of standby power consumption, which helps energy saving.




1 mA or above displayable\*



\* Capable of measuring 0.1 % or higher the rating of the secondary side of CT.

### Feature 3


Capable of simultaneously measuring up to three circuits in a single phase two-wire system of same power supply. The advanced type is also capable of N-phase measurement and electric leakage detection using the fourth CT.

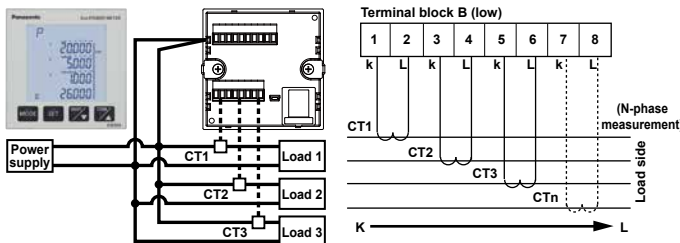

### Feature 4

Equipped with input and output terminals (Advanced type)

- Two pulse input points**: Simultaneously measures data including that other than electric energy (production amount, flow rate, etc.). Capable of time synchronization by inputting a clock setting trigger.
- Two pulse output points**: The PhotoMOS output allows for connection of NPN input and PNP input devices. Ready for alarm outputs, which are frequently used.

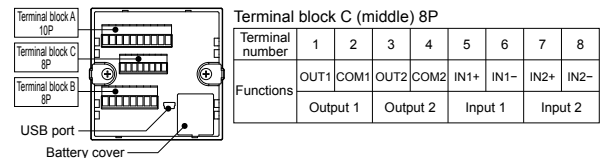

### Feature 5

Various log functions available (Advanced type)


Item	Record
Measurement max. value for each month Measurement min. value for each month (with time stamp*)	Power
	Current
	Voltage
	Power factor
	Frequency
	Unbalanced current
Max. demand value (active power, reactive power, apparent power, export active power, export reactive power, current) (with time stamp*)	Unbalanced voltage
	12 records (for 12-month), Max. value
Power quality* (with time stamp for happening date and period)	Voltage interruption
	Over voltage
	Under voltage
	Over current
	Under current

\* Time stamps and power quality data can be confirmed via communication. They are not displayed.

### Feature 6

Data can be made visualization by connecting the meter to DLL\* and logging the data. Alarms can be e-mailed to mobile phones or other equipment.


\*DLL is the abbreviation for Data Logger Light.

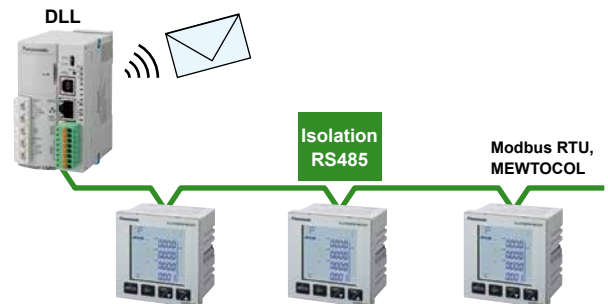

### Feature 7

You can measure power with a direct connection to an already-installed large-capacity general-purpose CT (secondary side 1 A / 5 A type).

\* The dedicated CT for Eco-POWER METER® cannot be used. Use a CT with a secondary side current of 1 A / 5 A.

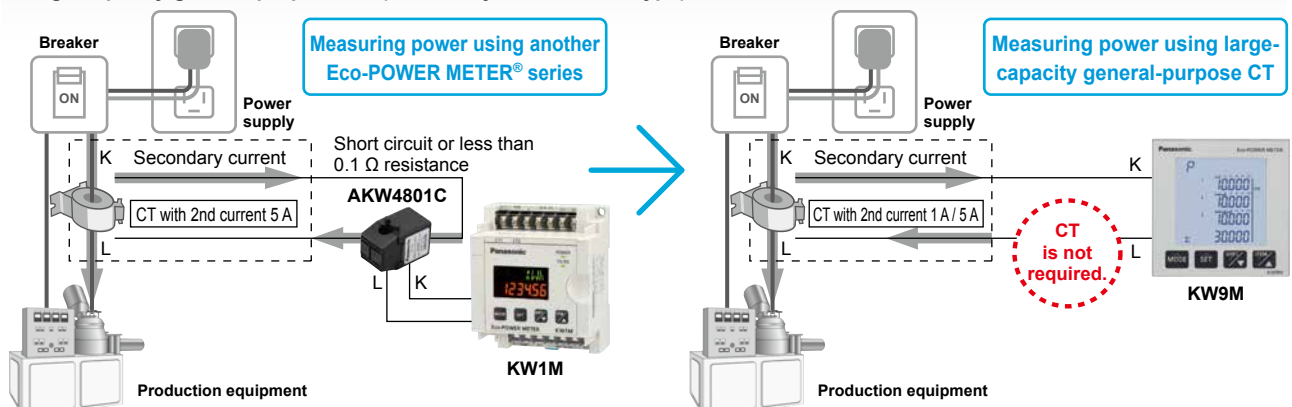

The measuring accuracy of the Eco-POWER METER® does not take the CT error into account. Other Eco-POWER METER® series (except AKW8115) need to use two CTs for measurement. KW9M is ready for direct input from only one CT, allowing higher accuracy measurements than with other Eco-POWER METER® series.




# Application Example

Multi-Function Power Meter  
Eco-POWER METER® **KW9M** SERIES

Eco-POWER METER® is a registered trademark of Panasonic Corporation. (Registered Trademark No. 5501901)

## Example of a comprehensive solution for the entire factory

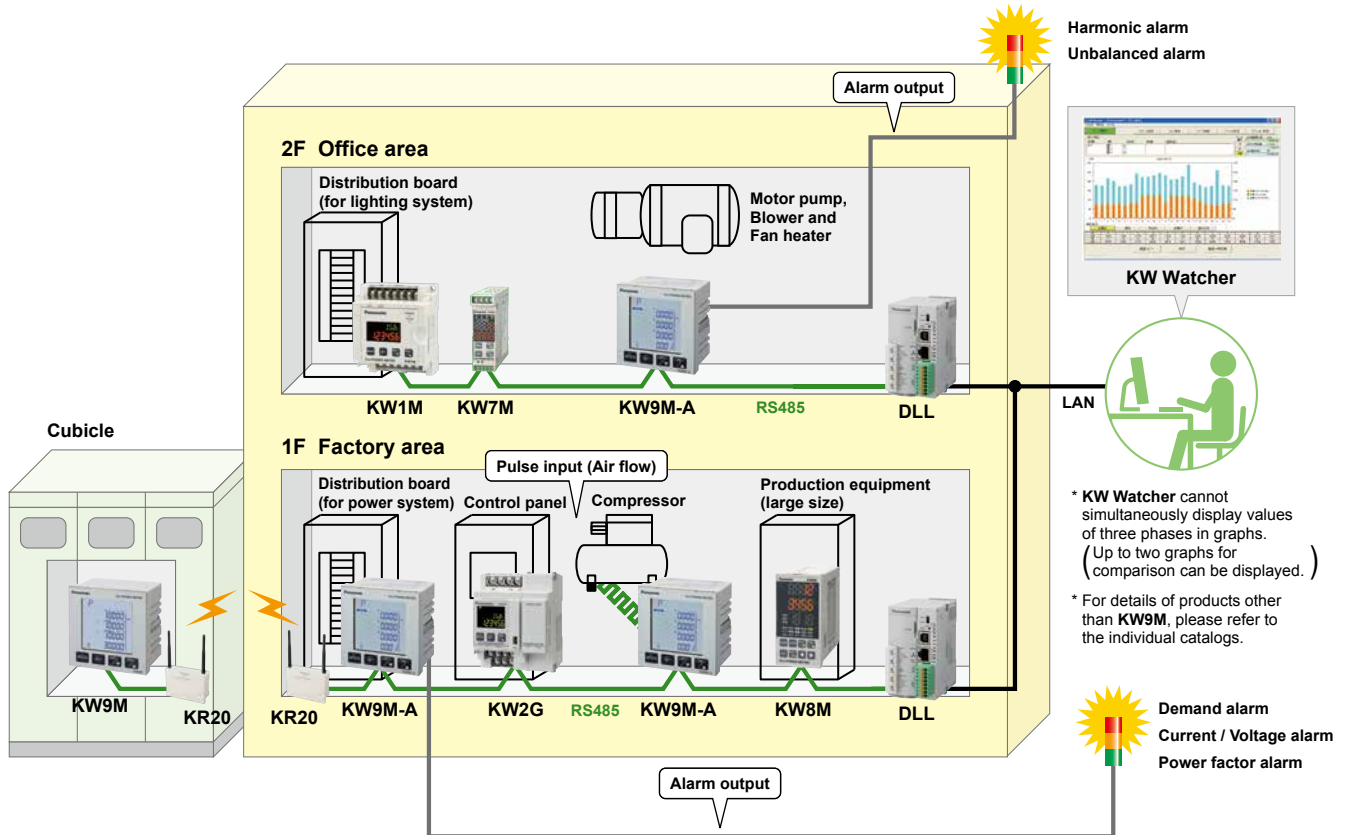

## Free visualization software for supporting energy management

Power consumption analysis enhances equipment operation efficiency.




KW Watcher can be downloaded, free of charge, from our website.

\*You can also check the required operating environments.

Free software to create graphs  
from data collected by DLL  
for energy management

- Cumulative bar charts by equipment and pie charts
- Comparison graphs by time and equipment
- Numeric display function
- Auto graph updating function

\* KW Watcher cannot simultaneously display values of three phases in graphs. (Up to two graphs for comparison can be displayed.)

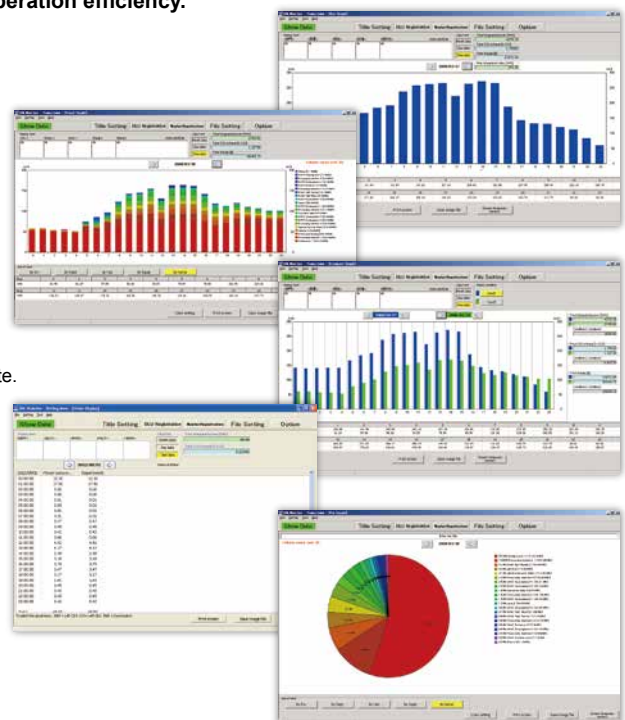

# Specifications

## Multi-Function Power Meter Eco-POWER METER® KW9M SERIES

Eco-POWER METER® is a registered trademark of Panasonic Corporation. (Registered Trademark No. 5501901)

### ■ ORDER GUIDE

Product name	Phase/Wire system	Input measurement voltage	Input measurement current	Applicable current transformer*	Model No.
<b>KW9M</b> Eco-POWER METER® Standard type	Single-phase two-wire (1P2W) Single-phase three-wire (1P3W) Three-phase three-wire (3P3W) Three-phase four-wire (3P4W) (common)	0 to 500 V AC	1 to 4,000 A	Secondary side current 1 A or 5 A	<b>AKW91110</b>
<b>KW9M</b> Eco-POWER METER® Advanced type			1 to 65,535 A		<b>AKW92112</b>

\*The dedicated current transformer (CT) can not be used. Please use a CT with a secondary side 1 A / 5 A.

### ■ OVERVIEW OF FUNCTIONS

Type	Standard	Advanced
Active power	Each phase and Total (Import, Export)	
Reactive power	Each phase and Total (Import, Export)	
Apparent power	Each phase and Total	
Power demand	—	IEC61557-12 demand 30-min demand Peak demand
Active electric energy	Each phase and Total (Import, Export)	
Reactive electric energy	Each phase and Total (Import, Export)	
Apparent electric energy	Each phase and Total	
Current	Each phase and Average current	Each phase, N-phase (when 3P4W) and Average current
Unbalanced current	—	Total (except N-phase)
Current THD	—	Each phase
Current harmonics	—	Each phase (2nd to 31st harmonics)
Current demand	—	Each phase current demand
Voltage	Line voltage (Each line and average), Phase voltage (Each phase and average)	
Unbalanced voltage	—	Total
Voltage THD	—	Line and Phase voltage
Voltage harmonics	—	Line and Phase voltage (2nd to 31st harmonics)
Power factor	Each phase and Average	
Frequency	Each phase and Average	
Pulse count (Integral pulse)	—	2 points
Temperature	Ambient temperature	
Calendar	—	Internal clock
Input	—	2 points
Output	—	2 points

\* IEC 61557-12 is an international standard on performance measuring and monitoring devices (PMD).

### ■ MEASUREMENT ITEMS

#### By Type

Type			Standard	Advanced		
Item	Unit	Display data range	Present value (Instantaneous value)	Present value (Instantaneous value)	Maximum	Minimum
Instantaneous power	Active kW	-99999 to 0.000 to 99999	●	●	●	●
	Reactive kvar					
	Apparent kVA					
Integral power (import)	Active kWh	0.00 to 9999999.9	●	●	—	—
	Reactive kvarh					
	Apparent kVAh					
Integral power for each time zone (4-zone) (import)	Active kWh	0.00 to 9999999.9	—	●	—	—
	Reactive kvarh					
	Apparent kVAh					
Integral power (export)	Active kWh	0.000 to 9999999.9	●	●	—	—
	Reactive kvarh					
	Apparent kVAh					
Integral power for each time zone (4-zone) (export)	Active kWh	0.000 to 9999999.9	—	●	—	—
	Reactive kvarh					
	Apparent kVAh					
Current	A	Standard: 0.000 to 8000.0	●	●	●	●
	N-phase when 3P4W	Advanced: 0.000 to 99999				
Voltage (Phase and Line voltage)	V	0.00 to 999999	●	●	●	●
Power factor		-1.000 to 0.000 to 1.000	●	●	●	●
Frequency	Hz	0.00 to 99.99	●	●	●	●
Pulse count value		0.000 to 999999999	—	●	—	—
Power conversion value	Total	0.000 to 999999999	●	●	—	—
	For each time zone					
Temperature	degree C	-100.0 to 100.0	●	●	—	—
Calendar		January 1, 2000 00:00:00 to Dec. 31, 2099 23:59:59	—	●	—	—

Note: "Display data range" is the range to be able to indicate with the main unit display, it is not a range that can be measured.

### ■ MEASUREMENT ITEMS

#### Power quality (Only advanced type)

Item	Unit	Display data range	Present value (Instantaneous value)	Maximum	Minimum
Unbalanced current	Each phase %	0.000 to 999.99	●	●	●
Unbalanced voltage	Each phase %	0.000 to 999.99	●	—	—
Current THD (total harmonic distortion)	Each phase %	0.000 to 400.00	●	—	—
Voltage THD (total harmonic distortion)	Each phase %	0.000 to 400.00	●	—	—
Current harmonics (2nd to 31st)	Each phase %	0.000 to 400.00	●	—	—
Voltage harmonics (2nd to 31st)	Phase %	0.000 to 400.00	●	—	—
	Line %	0.000 to 400.00	●	—	—

\* If the voltage to be measured is not the rated (commercial) frequency, it may take time for THD (total harmonic distortion) to stabilize.

#### Demand measurement (Only advanced type)

Item	Unit	Display data range	Present value (Instantaneous value)	Maximum	Minimum
Present demand	Active kW	0.000 to 99999	●	●	—
	Reactive kvar				
	Apparent kVA				
	Active (export) kW				
	Reactive (export) kvar				
	Current A				
Estimated demand (Note 1)	kW	0.000 to 99999	●	—	—
Ratio of estimated demand (Note 1)	%	0.000 to 99999	●	—	—
Integral power converted by pulse (Note 1)	kWh	0.000 to 999999.99	●	—	—

\* Please use this demand function as your standard.

The demand value calculated with this function is not guaranteed.

Note:

1) Only when 30-min demand is set.

### ■ MAIN UNIT SPECIFICATIONS

Type	Standard	Advanced
Supply voltage range	85 to 264 V AC 100 to 300 V DC	
Rated frequency	50/60 Hz	
Nominal power consumption	5 VA approx. (240 V AC at 25 °C 77 °F) 3 W approx. (240 V DC at 25 °C 77 °F)	6 VA approx. (240 V AC at 25 °C 77 °F) 3 W approx. (240 V DC at 25 °C 77 °F)
Inrush current	30 A or less (240 V AC/DC at 25 °C 77 °F)	
Allowable momentary power-off time	10 ms	
Ambient temperature	Accuracy guarantee: -10 to +55 °C 14 to 131 °F Operation: -25 to +55 °C -14 to 131 °F Storage: -25 to +70 °C -14 to 158 °F	
Ambient humidity	30 to 85 % RH (at 20 °C 68 °F) non-condensing	
Breakdown voltage (initial)	Between the isolated circuits: 2,000 V/1 min	Between the isolated circuits: 1,500 V/1 min
	a) enclosure - all terminals b) between insulated circuits • power supply terminals - other terminals • RS485 terminals - other terminals • measured current input terminals - other terminals • measured current input terminals - other terminals	a) enclosure - all terminals b) between insulated circuits • power supply terminals - other terminals • RS485 terminals - other terminals • measured current input terminals - other terminals • pulse input terminals - other terminals • pulse output terminals - other terminals
Insulation resistance (initial)	Between the isolated circuits: 100 MΩ or more	
Vibration resistance	10 to 150 Hz (7.5 minutes/cycle) single amplitude: 0.075 mm 0.0030 in (1 h on 3 axes) 10 to 55 Hz (1 minute/cycle) single amplitude: 0.375 mm 0.015 in (1 h on 3 axes)	
Shock resistance	Min. 294 m/s <sup>2</sup> (5 times on 3 axes)	
Display method	LCD with backlight	
Display updating time	100 ms	100 to 1000 ms (set with setting mode)
Power failure memory method (when power OFF)	Internal memory (overwrite 10 <sup>10</sup> or more)	
Calendar	Range	From January 1, 2000 00:00:00 to December 31, 2099 23:59:59
	Accuracy	±15 seconds/month (at 25 °C 77 °F)
	Backup	About 1-month (backup with secondary battery) (after passing 48-hour, at 23 °C 73.4 °F)
Degree of protection	Front: IP51, Back: IP20	
Sea level altitude	Under 2,000 m 6,562 ft	
Overvoltage category	2	
Pollution degree	II	
Dimensions W/H/D	96 × 96 × 56 mm 3.78 × 3.78 × 2.20 in (without terminal block) 96 × 96 × 68 mm 3.78 × 3.78 × 2.68 in (with terminal block)	
Weight	450 g approx.	480 g approx. (with secondary battery)

# Specifications

## Multi-Function Power Meter Eco-POWER METER® KW9M SERIES

Eco-POWER METER® is a registered trademark of Panasonic Corporation. (Registered Trademark No. 5501901)

### MEASUREMENT SPECIFICATIONS

Type	Standard	Advanced
Measured data	AC sine	
Phase/Wire system	Single-phase two-wire (1P2W) (max. 3-circuit), Single-phase three-wire (1P3W), Three-phase three-wire (3P3W) and Three-phase four-wire (3P4W) (Common)	
Applicable power system	100 V system, 200 V system and 400 V system	
Measured frequency	50/60 Hz	
Sampling rate	Sampling	1.024 MHz (1.0 μs approx.)
	Date update	100 ms
Voltage	Instantaneous value	100 ms
	Harmonics	—
	22.5s (2nd to 31st)	
	1P2W	L-L 0 to 500 V AC
	1P3W	L-L 0 to 500 V AC
	3P3W	L-L 0 to 250 V AC
	3P4W	L-L 0 to 500 V AC
	L-N	0 to 289 V AC
	Impedance	2 MΩ or more (L-N: V1/V2/V3-Vn)
	Resolution	0.01 V
Current	Power consumption	0.2 VA approx. (L-N: V1/V2/V3-Vn)
	Accuracy (Note 1)	0.5 % *1.0 % for 2-phase voltage of 1P3W, 3-1 voltage of 3P3W and line voltage of 3P4W.
	VT ratio	0.2 % *0.5 % for 2-phase voltage of 1P3W, 3-1 voltage of 3P3W and line voltage of 3P4W.
	Input current (with CT)	Primary current 4,000 A or less Secondary current 1 A or 5 A (set with setting mode)
	Max. current	10 A (200 % of the rating)
	Overload capacity	1,000 % of the rating for 3s
	Resolution	0.001 A
	Power consumption	0.2 VA approx.
	Accuracy (Note 1)	0.5 % *1.0 % for 2 (N) - phase of 1P3W and 2 (S) - phase of 3P3W.
	Accuracy (Note 1)	0.2 % (Note 2) *0.5 % for 2 (N) - phase current of 1P3W and 2 (S) - phase current of 3P3W.
Power	Accuracy (Note 1)	1.0 % Active power Class 1 (IEC 62053-21) Reactive power Class 2 (IEC 62053-23)
	Accuracy (Note 1)	0.5 % Active power Class 0.5S (IEC 62053-22) Reactive power Class 2 (IEC 62053-23)
Temperature	Accuracy	±5.0 °C ±41 °F (after ambient temperature correction with setting mode) Passing 2 hours or more after energized

Notes: 1) Without error of current transformers (CT) and voltage transformers (VT)  
2) As to the current under 5 % of rating, it may not satisfy the accuracy according to CT setting (max. error: 0.5 %).  
\* It measures from 0.1 % of CT secondary current.  
\* IEC62053 is the international standard for Electricity metering equipment.

### OUTPUT SPECIFICATIONS Only Advanced type

Number of output point	2 points *Insulate between output terminals
Insulation method	PhotoMOS relay
Output type	1a
Output capacity	100 mA, 30 V AC/DC
Output mode (OUT1/OUT2)	• Pulse by integral power • Output by alarm or events (set with setting mode)
Pulse output by integral power	Pulse width 100 ms approx. Pulse output unit 0.0001 kWh / 0.001 kWh / 0.01 kWh / 0.1 kWh / 1 kWh / 10 kWh / 100 kWh
Alarm output Event output	Type Stand-by power alarm / Under voltage alarm / Over voltage alarm / Power interruption alarm / Under current alarm / Over current alarm / Active power alarm / Reactive power alarm / Apparent power alarm / Power factor alarm / Over frequency alarm / Under frequency alarm / Voltage harmonics alarm / Current harmonics alarm / Voltage THD alarm / Current THD alarm / Unbalanced voltage alarm / Unbalanced current alarm / Power demand alarm / Current demand alarm / Counter output / Level output (external control)
Alarm reset	Self-reset (according to the setting) / Manual-reset
Protection element	Varistor (Note)

Note: Varistor is mounted internal as a protection element.  
Install a protective device in case of using at the place where it effects by surge.

#### How to calculate

- (1) Calculate the appropriate power to be measured from the unit of the integral power pulse output.  
Unit for pulse output > (Max. measurement power [kW]) / (3,600 sec × 1 pulse/sec)  
When the pulse output unit is 0.001, the maximum power that can be properly measured by pulse output is 3.6 kW (3,600 sec × 1 pulse/sec × 0.001).  
If the load is higher than this value, the output pulses cannot keep up with it, and the number of pulses becomes small.  
In such cases, set the pulse output unit to the value immediately above.

- (2) Calculate the appropriate pulse output unit from the instantaneous power to be measured.  
(Max. measurement power [kW]/3,600 sec × 1 pulse/sec) < Unit for pulse output  
When the maximum power to be measured is 10 kW, the pulse output unit required for the correct pulse output is 0.01 kWh/pulse, which is the value immediately above this one:  
10 W/3,600 sec × 1 pulse/sec = 0.0027

#### Notes:

- 1) If the pulse output unit is set to output one pulse or more per second, the Eco-POWER METER® cannot correctly output pulses.  
2) If the pulse output OFF time is set too short, count errors by connected counters, PLCs (Programmable Logic Controllers) may occur.

### INPUT SPECIFICATIONS (Only Advanced type)

Number of input point	2 points *Not insulate between input terminals (COM is common.)
Insulation method	Designated insulation for input (insulate to the other functions)
Input method	Contact/ non-voltage a contact or open-collector (Powered by an internal power supply)
Input signal	Non-voltage input • Impedance: Max. 1 kΩ (when short-circuit current: Max. 10 mA) • Residual voltage when shorted: Max. 3 V • Impedance when open: Min. 100 kΩ
Input mode	IN1 Pulse input or synchronized with output from outer device IN2 Pulse input
Max. counting speed	IN1 30 Hz (when pulse input) IN2 2000 Hz / 30 Hz
Min. input signal width	IN1 16.7 ms ON:OFF ratio = 1:1 IN2 0.25 ms (when 2000 Hz is set) / 16.7 ms (when 30 Hz is set) ON:OFF ratio = 1:1
Pre-scale	Decimal point Under 3-digit Range 0.001 to 100.000 (set with setting mode)
Output mode (when pulse output is selected)	HOLD
Protective elements	Zener diode

### DEMAND MONITOR AND CONTROL SPECIFICATIONS (Only Advanced type)

Demand type	• Peak demand • IEC61557-12 demand 1. Sliding block interval demand 2. Fixed block interval demand 3. Current demand • 30-min demand (set with setting mode)
Demand monitor input type	Current transformer (CT) input (IEC demand /30-min demand) Integral pulse input (only 30-min demand) (set with setting mode)
Demand time span	IEC61557-12 demand 1 to 60 min. (set with setting mode) 30 min. (fixed)
Demand measurement item	Present demand, Estimated demand (only 30-min demand)
Demand calculate method (Note)	Additional method / Average method (set with setting mode)
Demand data update cycle	1 min.
Demand stand-by time (mask time) (Note)	1 to 30 min. (set with setting mode)
Display	IEC61557-12 demand 30-min demand Present demand [active/ reactive/ apparent/active/export/ reactive/export/ current] Power demand (active power), Estimated demand, Demand target value, Ratio of estimated demand, Current present demand, Monthly max. demand, Max. demand
Saved data	Monthly max. demand 12 records (12-month), Max.demand
Time span synchronized method	Clock synchronized (Pulse input to IN1) (set with setting mode)
Synchronized signal input <IN1>	Input terminal IN1 Input method Non-voltage a contact or open-collector (Powered by an internal power supply) Pulse input condition Pulse width 50 ms or more Operating voltage/ current 5 V DC 10 mA Signal common Common (IN2; common to pulse input)
Pulse input <IN2>	Input terminal IN2 Input method Non-voltage a contact or open-collector (Powered by an internal power supply) Pulse input signal 50,000 pulse/kWh <An external pulse detector required> 2,000 pulse/kWh <An external pulse convertor required> Pulse rate 0.001 to 100.000 kWh/pulse Pulse input condition 2000 Hz Pulse width 0.25 ms or more 30 Hz Pulse interval 0.5 ms or more (OFF: 0.25 ms or more) Pulse interval 16.7 ms or more 33.4 ms or more (OFF: 16.7 ms or more) Operating voltage/ current 5 V DC 10 mA Signal common Common (IN1; common to clock synchronized input)

Note: The time span can be arbitrarily set only for sliding block interval demand and fixed block interval demand.

### COMMUNICATION SPECIFICATIONS

#### <RS485>

Interface	Conforming to RS485
Communication method	Half-duplex
Synchronous system	Synchronous communication method
Isolation status	Isolated with the internal circuits
Protocol	MEWTocol, MODBUS (RTU), DL/T645-2007 (Note 1) (select with setting mode)
Number of connected unit	99 (max.) (Note 2)
Transmission distance	1,200 m 3,937 ft (Note 3)
Transmission speed	38,400, 19,200, 9,600, 4,800, 2,400, 1,200 bps (select with setting mode)
Transmission format	Data length 8bit (fixed) Parity Not available / odd number / even number (select with setting mode) Stop bit 1bit, 2bit (select with setting mode)

- Notes: 1) MEWTocol is the protocol for PLC from Panasonic. DL/T645 is the China power-meter standard. Only DL/T645-2007 is supported.  
2) For RS485 converter on the computer side, we recommend SI-35 and SI-35USB (from LINE EYE Co., Ltd.). When using SI-35, SI-35USB or PLC from our company (which can be connected up to 99 units), up to 99 can be connected.  
In case using this system with the other devices, up to 31 can be connected.  
3) Please check with the actual devices when some commercial devices with RS485 interface are connected. The number of connected devices, transmission distance, and transmission speed may be different according to using transmission line.


# Dimensions

Multi-Function Power Meter  
Eco-POWER METER® **KW9M** SERIES

## EXTERNAL DIMENSIONS

(Unit: mm in)


Eco-POWER METER® is a registered trademark of Panasonic Corporation. (Registered Trademark No. 5501901)

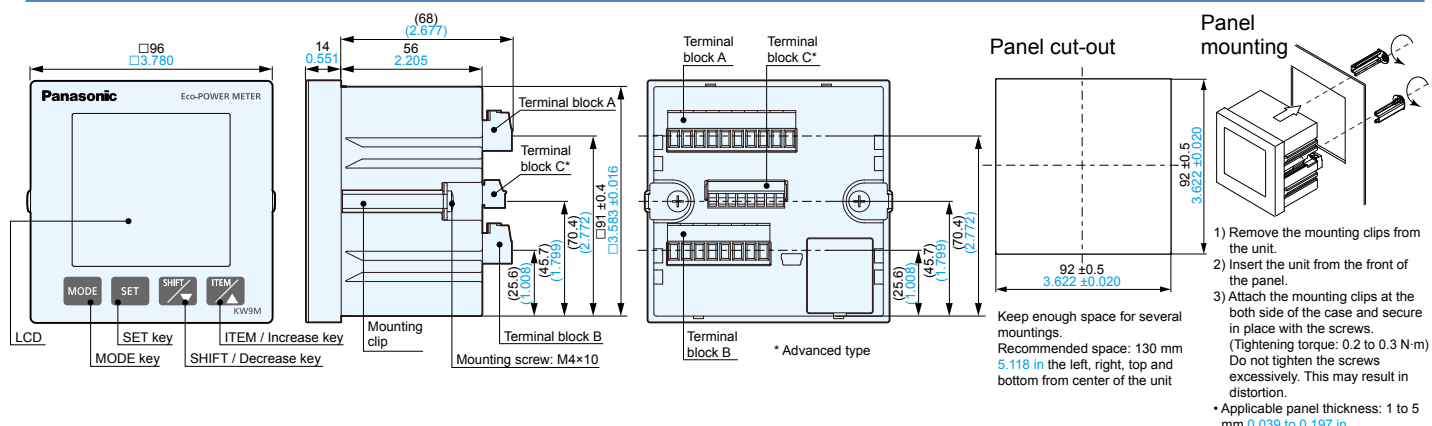

## TERMINAL ARRANGEMENT AND WIRING DIAGRAMS

### Terminal wiring

- Be sure to wire correctly according to the terminal arrangement and wiring diagrams.
- Please connect a fuse or a breaker to power supply part for safety reasons, to protect the device and ease of maintenance.
- This has no built-in power switch, circuit breaker or fuse for measured voltage input parts. Therefore it is necessary to install them in the circuit near this unit.
- Do not turn on the power supply or input until all wiring is completed.
- Do not open the secondary side of CT while the primary side current is energized. Do not remove the terminal block while the primary side current of CT is energized. These actions may result in electric shock or CT breakdown.

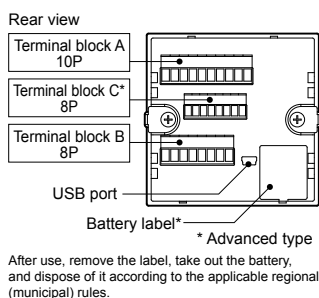

**Specifications of terminal block A/B**  
 Screw size: M2.5  
 Tightening torque: 0.4 to 0.5 N·m  
 Applicable wire: (Crimp-type terminal is recommended.)  
 • Single wire 0.13 to 4 mm<sup>2</sup> (AWG26 to 12)  
 • Stranded wire 0.2 to 4 mm<sup>2</sup> (AWG24 to 12)

• for 2 pcs.  
 Single wire / Stranded wire 2 pcs.  
 0.5 to 2.1 mm<sup>2</sup> (AWG20 to 14)  
**Specifications of terminal block C**  
 Screw size: M2.0  
 Tightening torque: 0.2 to 0.25 N·m  
 Applicable wire: (Crimp-type terminal is recommended.)  
 • Single wire 0.08 to 1.5 mm<sup>2</sup> (AWG28 to 16)  
 • Stranded wire 0.2 to 1.5 mm<sup>2</sup> (AWG24 to 16)

Stripping length: 7 to 8 mm 0.276 to 0.315 in

### Terminal arrangement

#### Terminal block A (upper) 10P

Terminal number	1	2	3	4	5	6	7	8	9	10
Functions	L+	N-	V1	V2	V3	Vn	NC	SG	A+	B-
	AUX (Power supply)		Measured voltage input				Vacant		RS485	

#### Terminal block C (middle) 8P (Only Advanced type)


Terminal number	1	2	3	4	5	6	7	8
Functions	OUT1	COM1	OUT2	COM2	IN1+	IN1-	IN2+	IN2-
	Output 1		Output 2		Input 1		Input 2	

#### Terminal block B (lower) 8P

Terminal number	1	2	3	4	5	6	7*	8*
Functions	CT1 K	CT1 L	CT2 K	CT2 L	CT3 K	CT3 L	CTn K	CTn L
	Measured current input							

\* The N-phase measurement is available for the advanced type only.

### Wiring diagrams

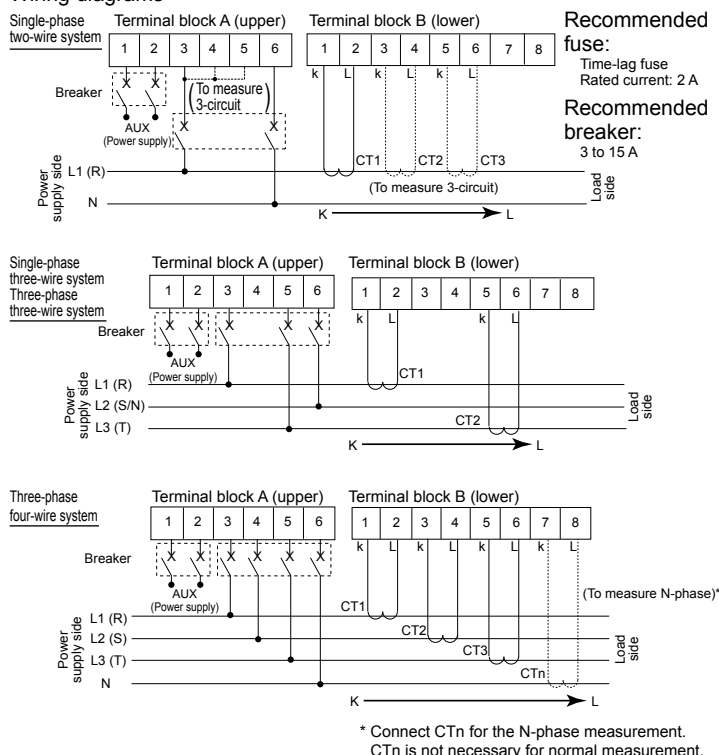

Please contact .....

**Panasonic Industrial Devices SUNX Co., Ltd.**

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan

Global Sales Department

■Telephone: +81-568-33-7861 ■Facsimile: +81-568-33-8591

panasonic.net/id/pidsx/global

**Panasonic**

All Rights Reserved ©Panasonic Industrial Devices SUNX Co., Ltd. 2013

No. CE-KW9M-2-4 August, 2013

Specifications are subject to change without notice.

Printed in Japan